

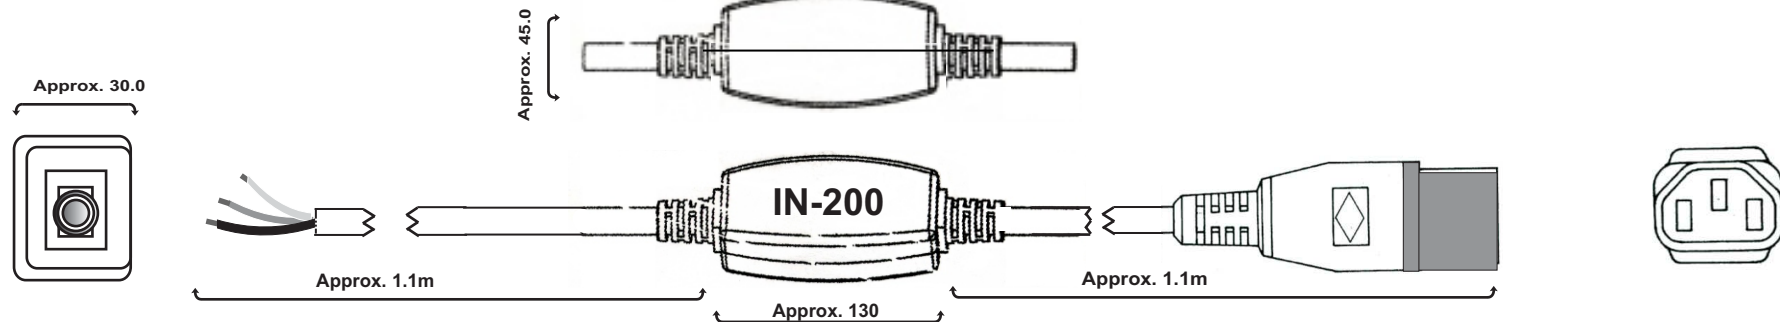


Rev	Date
1	05/14/07
2	9/30/16
3	3/22/17

High Frequency In-Line Filter Cord IN-200

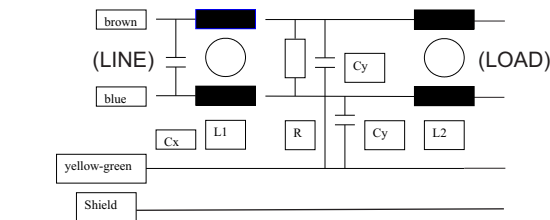

Manufacturer P/N	Listed Cord (2)	Voltage	I A	L mH	C _x uF	C _y nF	R Meg Ω	U _{test} P/N kV dc	U _{test} P+N/Gnd kV ac	Max. Leakage Current 250V-50H mA
IN 200	Shielded 3AWG18	250V, 50-60 Hz	10	2 x 0.8	0.1	2.2	1 (1/4w)	1200 V 2 mA 3 sec	2.1	2 x 0.3

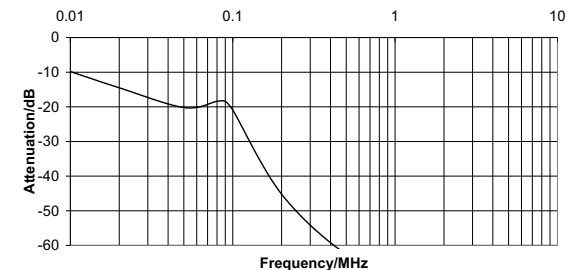

Typical Attenuation

Construction

- Cable:
 - Low-pass aluminum foil shielded cable H05 VV-F 3G1.0mm² with ferrite coated (FerroCom) line and neutral conductors (P&N) for high frequency performance.
 - Length - 2 meters, Flame test acc to UL VW-1 and VDE 0742, part 804.
 - Color light grey (RAL 7035) with longitudinal stripe.
- Cable end:
 - appliance coupler according to IEC 60320-C13
- Opposite end:
 - Ready made ends
- Housing - crush proof. Total resistance of the shield from cable end to cable end including housing is one ohm max.



EMC Eupen

5033 Industrial Road., Bldg. 6
Farmingdale, NJ 07727

732-919-1100 Telephone
732-919-7196 Fax
sales@emceupen.com
www.emceupen.com

High Frequency Power Cord with In-Line Filter Elements

Drawing No.
IN-200

Drawn By	MCL	Eng	CK MK	QA	CK PH
Date:	05/14/07	Date:	05/14/07	Date:	05/14/07
Approval:				WJW Approved Sig	
Customer P/N:	TBD			Sheet 1	