SPECIFICATION	
Listed cord (2)	Shielded 3G1.0
Voltage	250V, 50 Hz
I A	10
L *m*H	0.8
C_x *u*F	0.1
C_y *n*F	2.1
U_{test} P/N kV dc	2.1
U_{test} P+N/Gnd kV dc	2.1
Max. leakage Current 250V-50Hz mA	2x0.01
Certification	CE

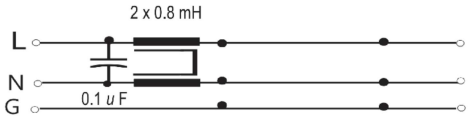

CIRCUIT

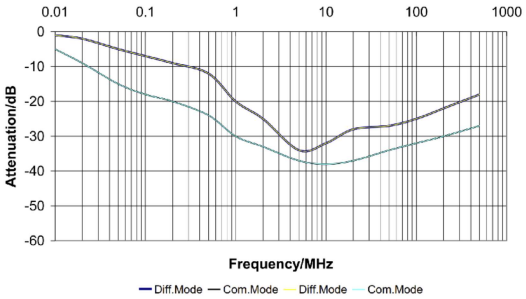

TYPICAL ATTENUATION

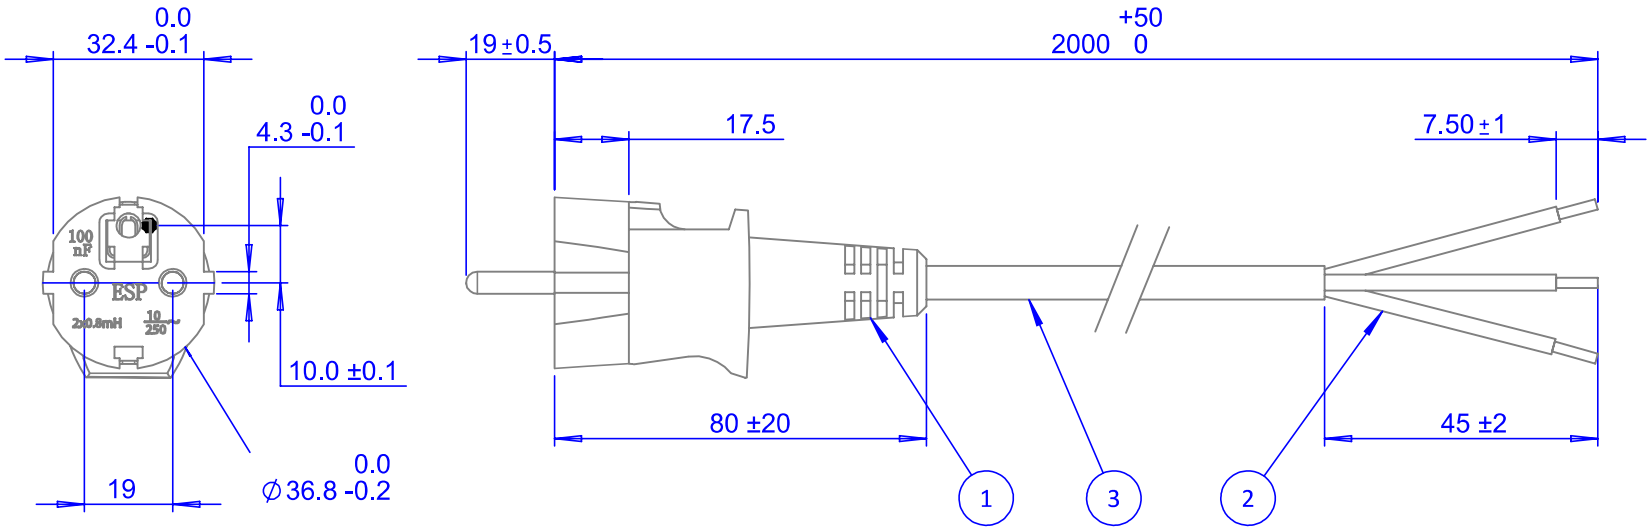

CONSTRUCTION

1. **PLUG:** According to CEE 7-VII with double protective conductor system VDE/UTE with built in X capacitor and common mode inductor.
2. **CABLE END:** Ready-made ends.
3. **CABLE:** Aluminum foil shielded cable SVT 3AWG18.
   LENGTH: 2 meters.
   COLOUR: Light grey (RAL 7035).
   FLAME TEST: According to UL VW-1 and VDE 0742, part 804.

EMC Eupen
5033 Industrial Road., Bldg. 6
Farmingdale, NJ 07727
732-919-1100 Telephone
sales@emceupen.com
www.emceupen.com

Rev.	Date
1	6/15/05
2	7/22/05
3	9/29/17
4	8/5/19
5	11/10/22

Dwg no: **ES-102**		
Style no: **IMX-23**		
Desc: **EMC Power Cord with Built In Filter Elements**		
Drawn:	LRA	11/10/22
Checked:	WJW	12/13/22
Approved:	JWW	12/13/22
Approval: Declaration of Conformity		
Sheet: 1	Size: Letter	Units: mm