
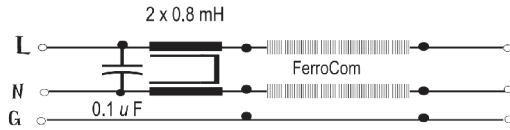
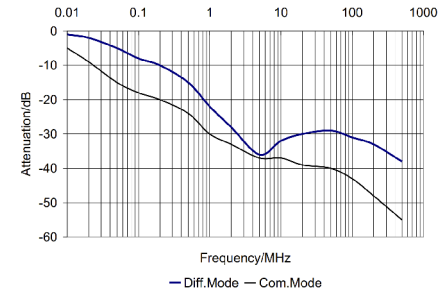



ch-#@# u@V	
0	8
t	t =
@	
0 =	
# 7	
# 7	V °
y h V t	
y h V 8 t	
U # t =	
#	E-545138
	E-301305
	E-218937
	




#@#y@



u h@° 0° uu-Vy° u@V

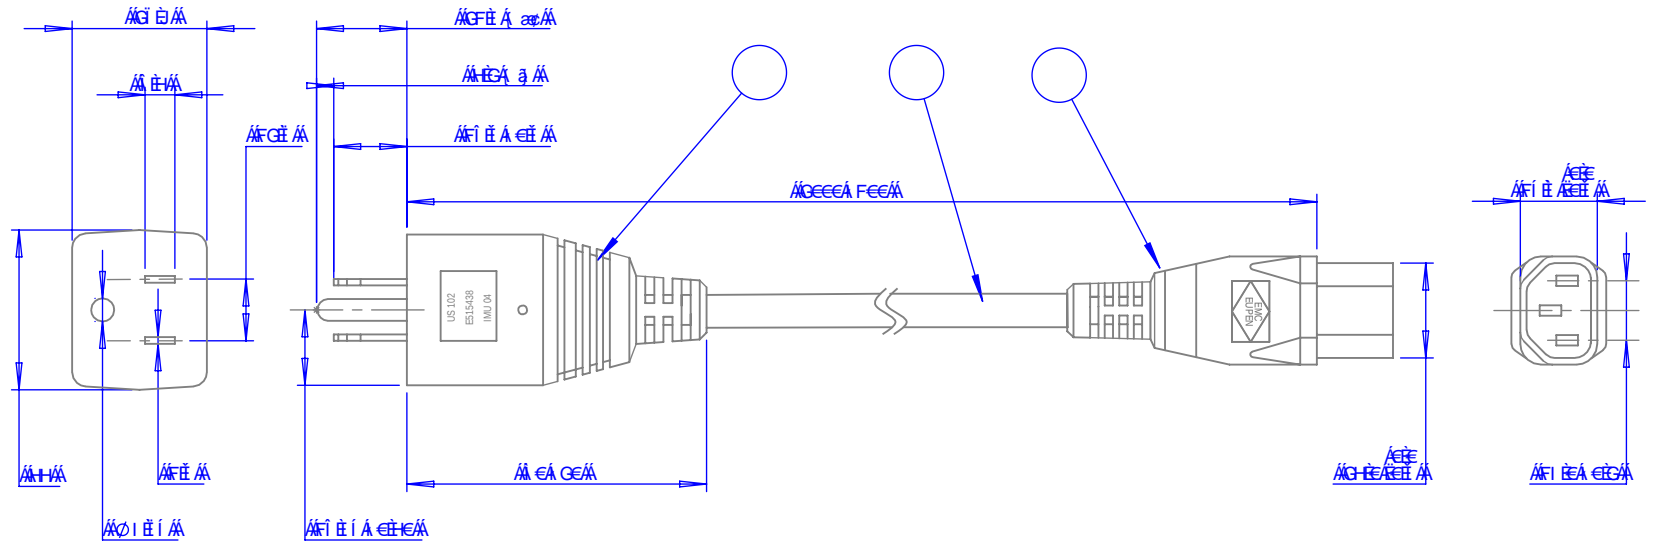

#\ Vouky#u@V
 hqy8
 # " G -V) @# #
 # " G E-301305 AWM 20740 18AWG 60°C 300V VW-1 AWM 60°C 300V
 Low-pass aluminum foil shielded cable with ferrite coated (FerroCom)
 line and neutral conductors (P&N) for high frequency performance.
 OV8u=
 #\ Q,yk 0 k°
 70 U - u-@ yOt† t)-

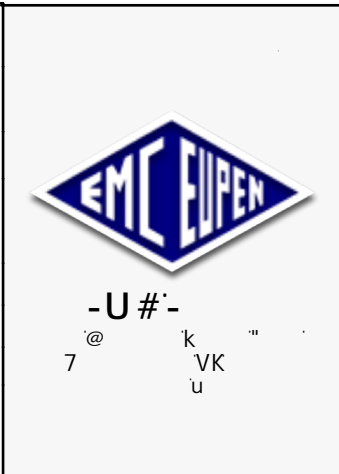

k)	V°		
		@y		
		-U#h # " @7 "		
)	α°	
		#	‡ K‡	
7	9/14/23		K‡ ‡	
		yO #o° E-545138 / -		
		o	o O	y