
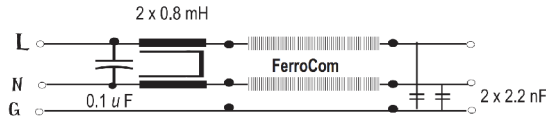
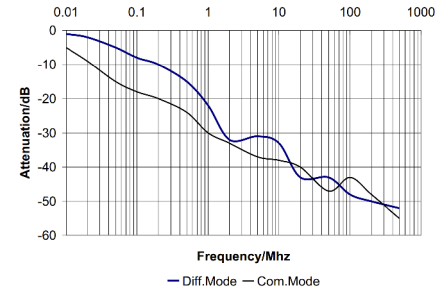



ch-#@# u@V	
o	8
t	t =
@	
O =	
# 7	
# 7	
y h V t	
y h V 8 t	
U # t =	
#	--
	E-301305 E-218937




#@#y@



u h@° O° uu-Vy° u@V

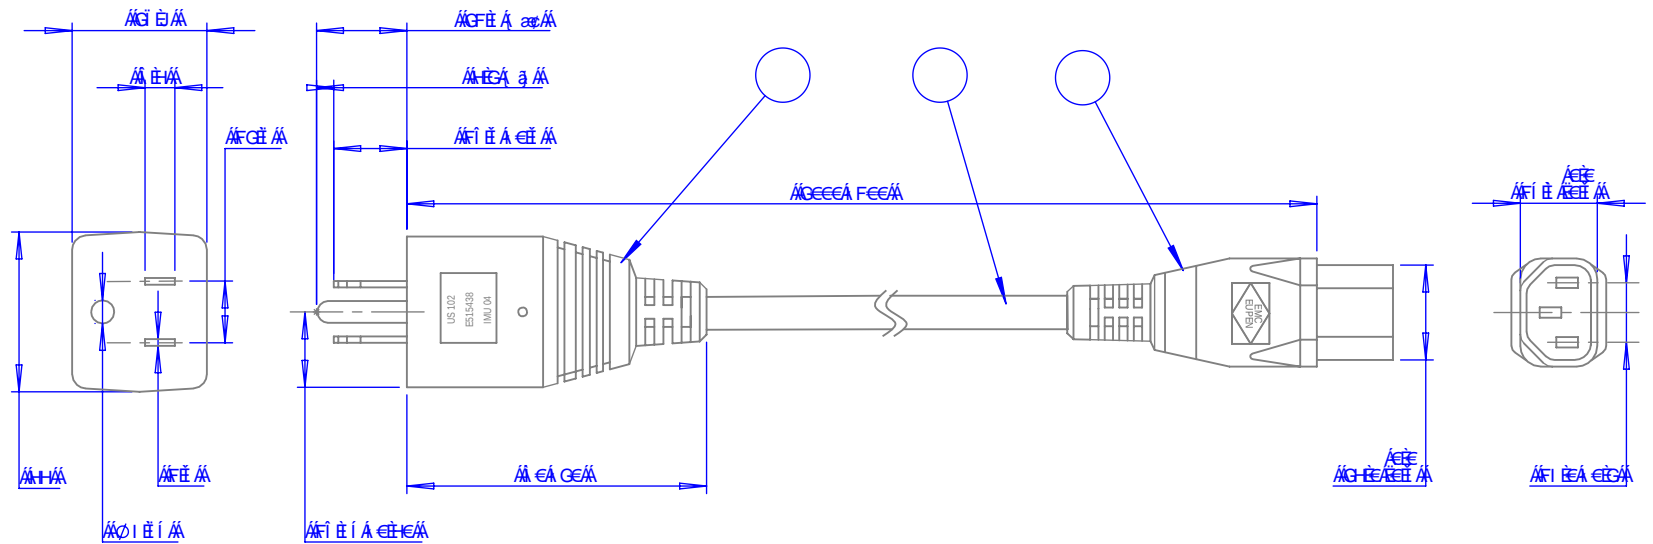

#\ Vouky#u@V  
 hq8  
 # " O -V)  
 # " O E-301305 AWM 20740 18AWG 60°C 300V VW-1 AWM 60°C 300V Low-pass aluminum foil shielded cable with ferrite coated (FerroCom) line and neutral conductors (P&N) for high frequency performance.  
 OV8u=  
 #\ O,yk  
 70 U - u-au

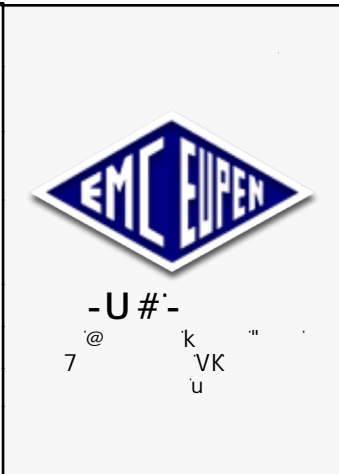

k	)	V°		
		@y		
		-U#h #		
		)	α°	
		#	‡‡	
7	9/14/23		‡‡	
		yO #o° E-545138 / E218937		
		o	o O	y