
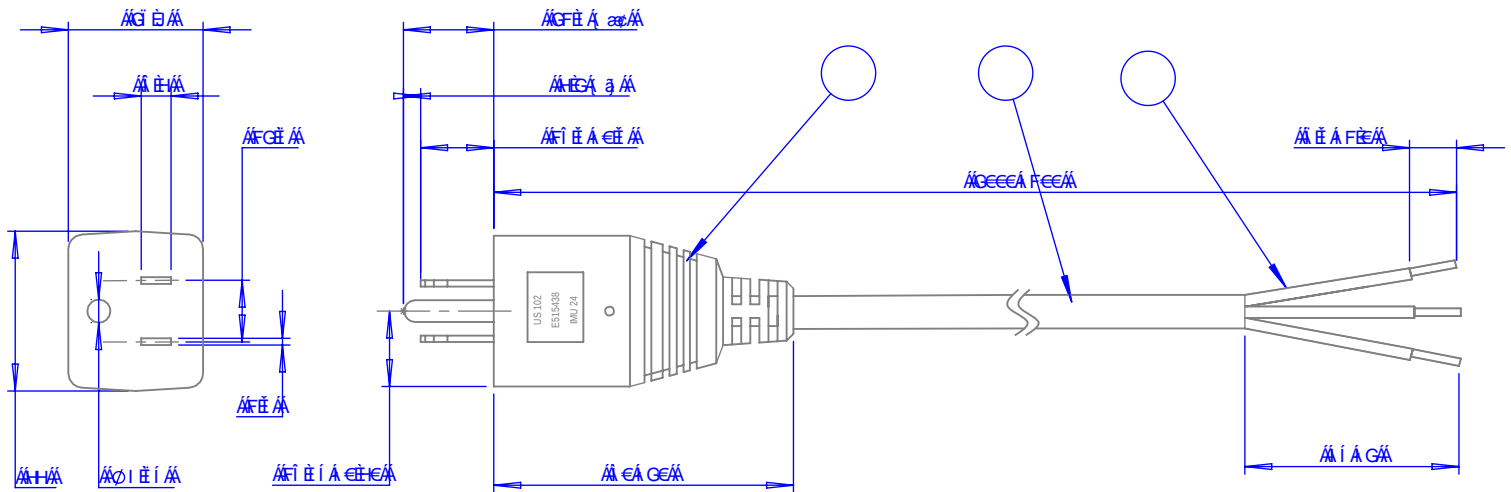
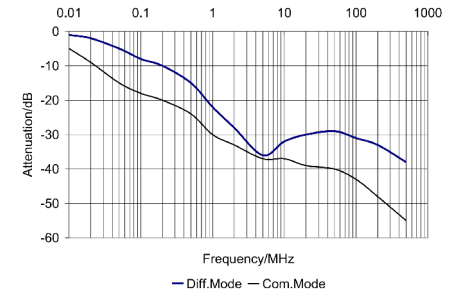
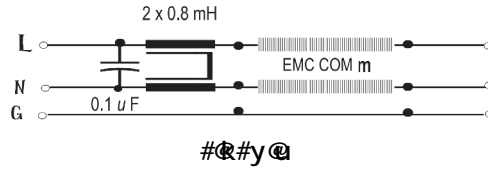
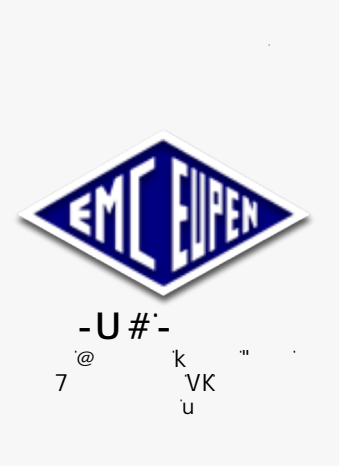


ch-#@#° u@V	
O	8
†	† =
@	
O =	
# 7	
# 7	V°
y h V †	
y h V 8 †	
U # † = °	
#	E-545138
	E-301305
	E-218937



u h#° O° uu-Vy° u@V

#\ Vauky#u@V  
 hgy8  
 #° "G (-V) k  
 #° "G E-301305 AWM 20740 18AWG 60°C 300 VW-1 AWM 60°C 300V Low-pass aluminum foil shielded cable with ferrite coated (FerroCom) line and neutral conductors (P&N) for high frequency performance.  
 OV8u= 2 meters  
 #\ Q yk Light grey (RAL 7035) with longitudinal stripe.  
 70 U - u-au



k	)	V°		
		@y		
		-U#h # " @7 "		
		)	α°	
		#	† K	
7	9/14/23		K †	
		yO #o° --545138 - 1 / E-218937		
		o	o O	y