




ch-#@# u@V	
0	0 8
t	t =
@	
0 =	
# 7	
# 7	V °
y h V t	
y h V 8 t	
U # t =	
#	CE

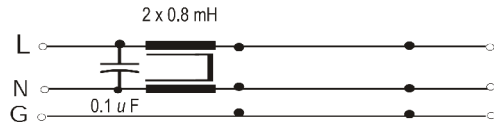

#@#y@

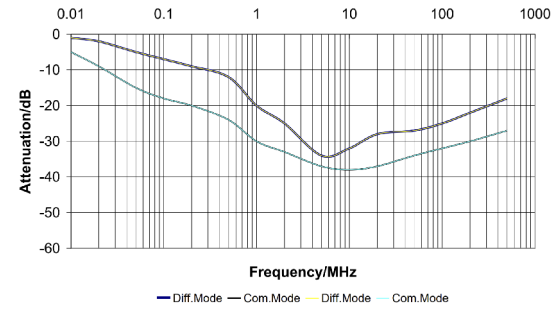

u h@° 0° uu-Vy° u@V

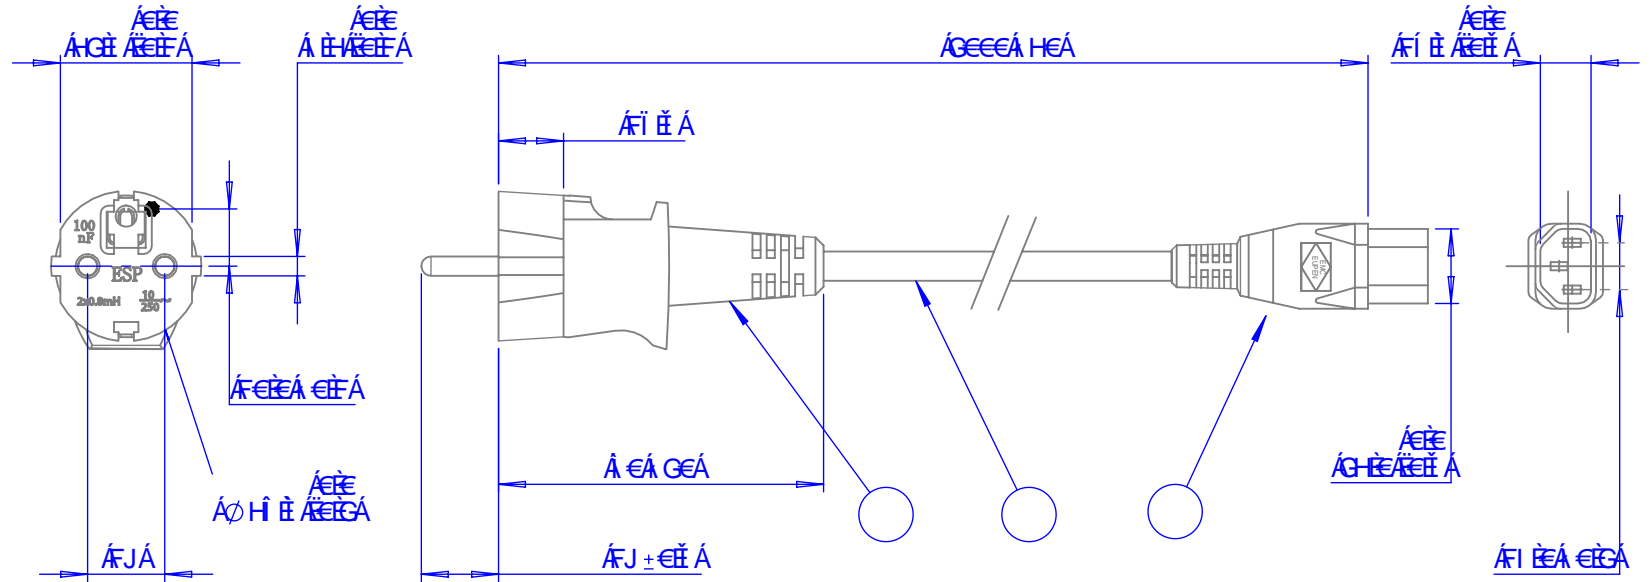

#\ Vouky#u@V
 hgy8 #-- t@ t) - yu-
 CE
 # "G -V) @# #
 # "G UL SJTW 16AWG (3X1.31mm²) 105°C 300V shielded (foil) (OD=9.00mm)
 QV8u=
 #\ Q,yk 0 k°0
 70 U - u-α yOt† t)-

-U#-
 7 @ k VK u

k)	-O		
		@CE		
		-U#h # " @7 -		
4	6/5/26		KAK	6/5/26
		#	‡ K‡	6/8/26
			K‡ ‡	6/8/26
) #		
		o	o O	y