




SPECIFICATION	
Listed cord (2)	Shielded 3G1.0
Voltage	250V, 50 Hz
I A	10
L mH	0.8
C _x uF	0.1
C _y nF	2.2
U _{test} P/N kV dc	2.1
U _{test} P+N/Gnd kV ac	2.1
Max. leakage Current 250V-50Hz mA	2x0.5
Certification	CE

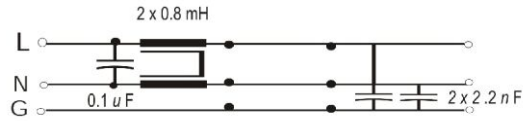

CIRCUIT

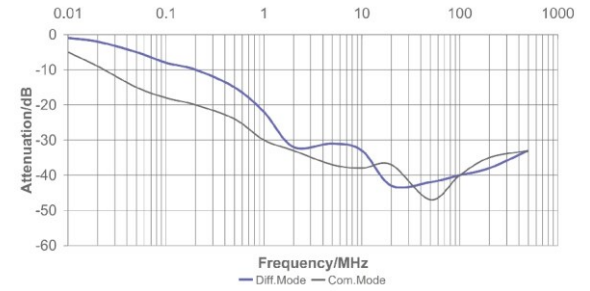

TYPICAL ATTENUATION

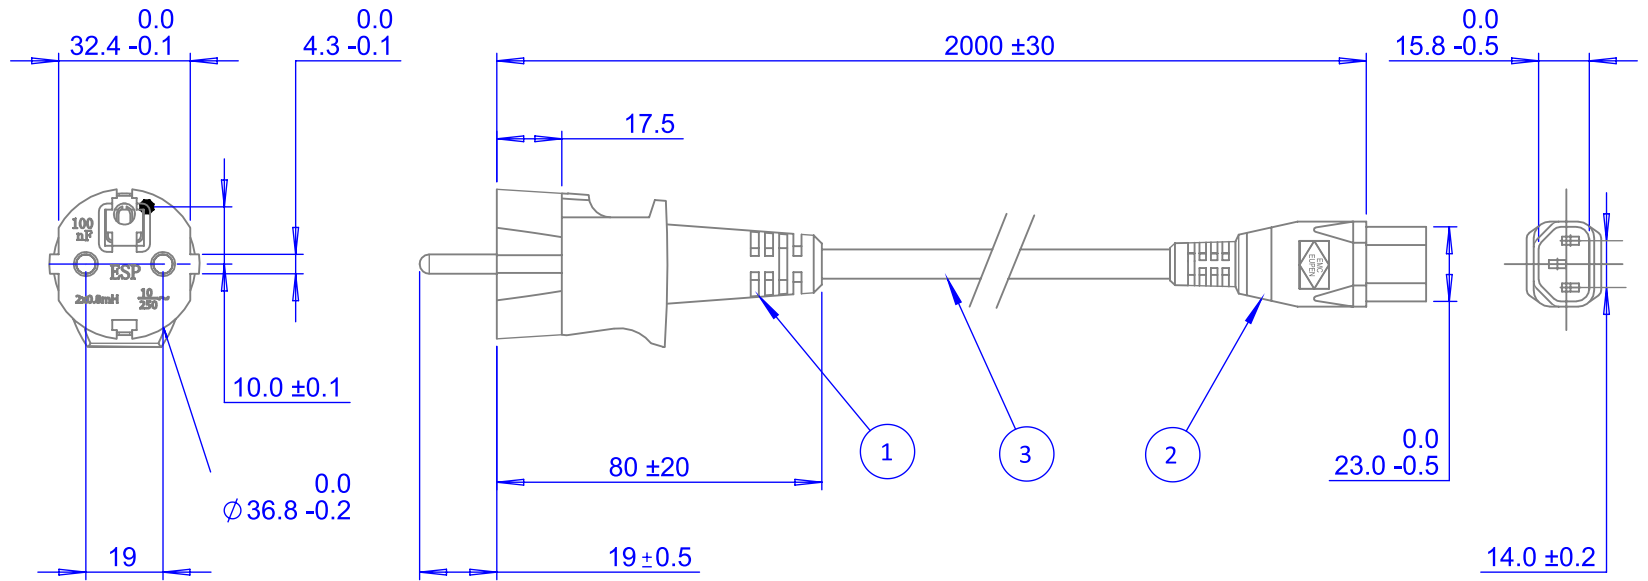

CONSTRUCTION

- 1. PLUG:** According to CEE 7-VII with double protective conductor system VDE/UTE with built in X capacitor and common mode inductor.
- 2. CABLE END:** Appliance coupler according to IEC 60320-C13 with built in Y capacitor 2.2 nF/250V.
- 3. CABLE:** UL SJTW 16AWG (3x1.31mm²) 105 °C 300V shielded (foil) (OD=9.00mm)
- LENGTH:** 2 meters.
- COLOUR:** Light grey (RAL 7035).
- FLAME TEST:** According to UL VW-1 and VDE 0742, part 804.



EMC Eupen
 5033 Industrial Road., Bldg. 6
 Farmingdale, NJ 07727
 732-919-1100 Telephone
 sales@emceupen.com
www.emceupen.com

Rev.	Date	Dwg no:	ES-101		
1	6/15/05	Style no:	IMX-13		
2	7/22/05	Desc:	EMC Power Cord with Built In Filter Elements		
3	11/10/22		Drawn:	KAK	6/5/26
4	6/5/26		Checked:	WJW	6/8/26
			Approved:	JWW	6/8/26
		Approval: Declaration of Conformity			
		Sheet: 1	Size: Letter	Units: mm	