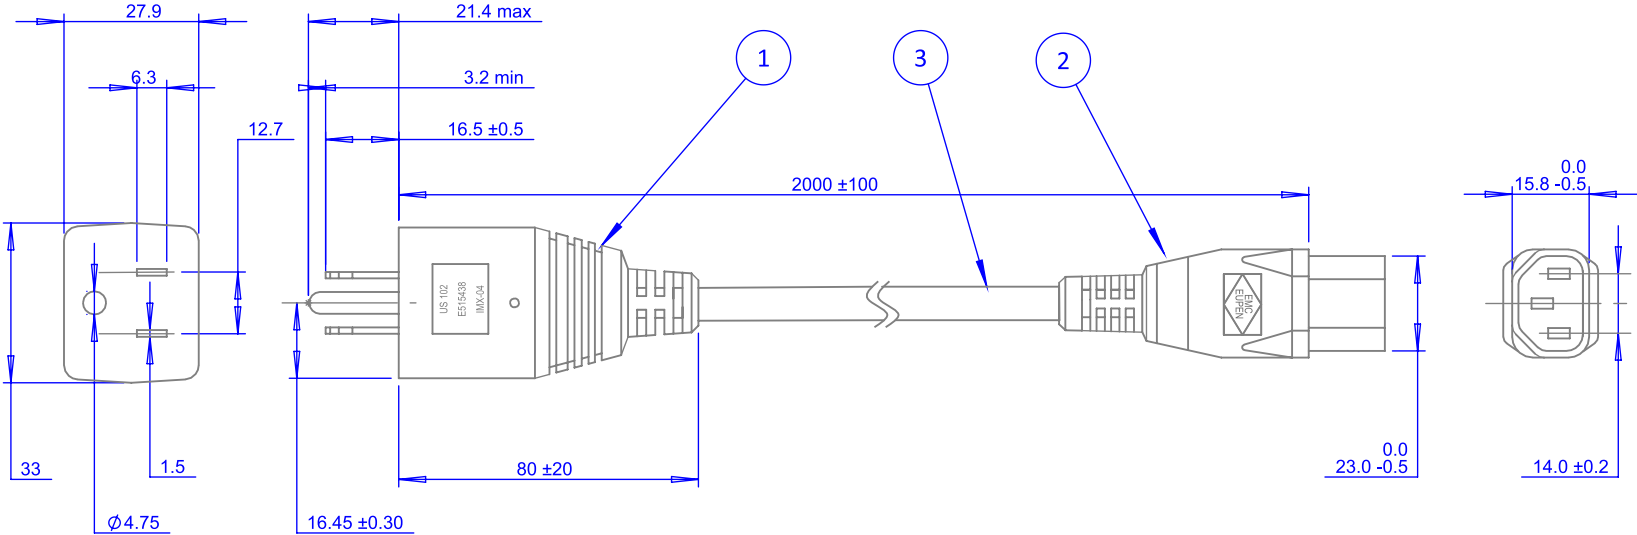


SPECIFICATION		 CIRCUIT 
Listed cord (2)	Shielded 3AWG18	
Voltage	125V, 50-60 Hz	
I A	15	
L mH	0.4	
C _x uF	0.1	
C _y nF	2.2	
U _{test} P/N kV dc	2.1	
U _{test} P+N/Gnd kV ac	2.1	
Max. leakage Current 125V-60Hz mA	2x0.15	
Certification	 E515438	

CONSTRUCTION 1. PLUG: US Plug 102, 13 A, 125V, 2 pole, 3 wire - plug according to UL 498. (NEMA 5-15P) with built-in X capacitor and common mode inductor. UL File Number 515438. 2. CABLE END: Appliance coupler according to IEC-60320-C13 with in-built Y capacitors 2.2 nF / 125 V. 3. CABLE: Aluminum foil shielded cable SJTW 14AWG x 3C 105°C. UL File Number TBD. LENGTH: 2 meters. COLOUR: Light grey (RAL 7035). FLAME TEST: Accordingly to UL VW-1 and VDE 0742, part 804.	EMC-EUPEN SOLUTION FOR ELECTRONIC POLLUTION EMC Eupen 5033 Industrial Road., Bldg. 6 Farmingdale, NJ 07727 732-919-1100 Telephone sales@emceupen.com www.emceupen.com	Rev.	Date	Dwg no: NA-104		
		1	8/4/22	Style no: IMX-14-14AWG		
		2	8/12/22	Desc: EMC Power Cord with Built In Filter Elements		
		3	10/20/22			
		4	11/8/22			
		5	12/12/22	Drawn:	LRA	8/18/26
		6	8/18/26	Checked:	WJW	8/18/26
		7		Approved:	JWW	8/18/26
				UL File Number 515438		
				Sheet: 1	Size: Letter	Units: mm