




SPECIFICATION	
Listed cord (2)	Shielded 3AWG18
Voltage	125V, 50-60 Hz
I A	10
L mH	0.8
C _x μF	0.1
C _y nF	N/A
U _{test} P/N kV dc	2.1
U _{test} P+N/Gnd kV ac	2.1
Max. leakage Current 125V-60Hz mA	2x0.02
Certification	 E515438



CIRCUIT

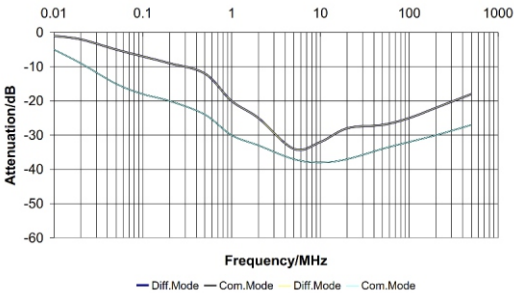

TYPICAL ATTENUATION

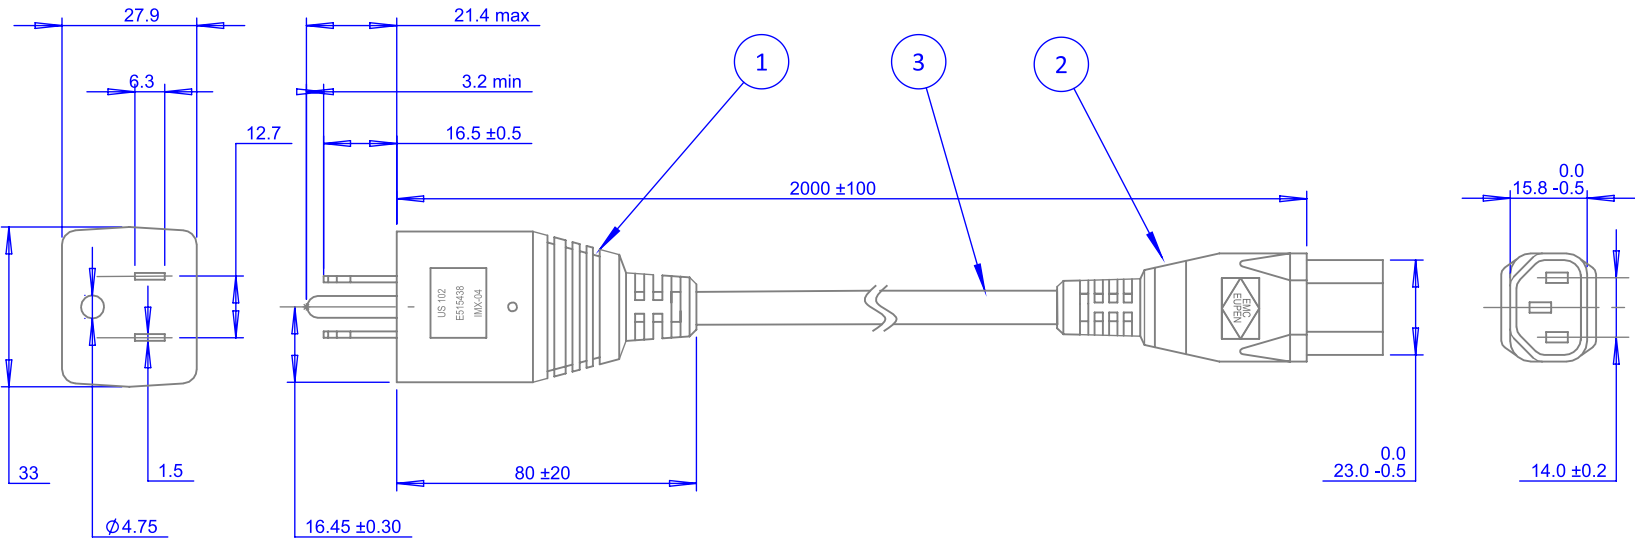

CONSTRUCTION 1. PLUG: 15 A, 125 V, 2 pole, 3 wire plug according to UL 498 (Nema 5-15P) with built-in X capacitor and common mode conductor. 2. CABLE END: Appliance coupler according to IEC 60320-C13. 3. CABLE: Aluminum foil shielded cable SVT 3AWG18. LENGTH: 2 meters. COLOUR: Light grey (RAL 7035) with longitudinal blue stripe. FLAME TEST: According to UL VW-1 and VDE 0742, part 804. UL FILE NUMBERS: E192178 E472060 E495741	EMC-EUPEN SOLUTION FOR ELECTRONIC POLLUTION EMC Eupen 5033 Industrial Road., Bldg. 6 Farmingdale, NJ 07727 732-919-1100 Telephone sales@emceupen.com www.emceupen.com	Rev.	Date	Dwg no: NA-100		
		1	6/15/05	Style no: IMX-04		
		2	7/22/05	Desc: EMC Power Cord with Built In Filter Elements		
		3	7/16/09			
		4	7/9/10			
		5	8/7/17	Drawn:	LRA	6/30/26
		6	11/2/22	Checked:	WJW	6/30/26
		7	6/30/26	Approved:	JWW	6/30/26
				UL / CSA E515438 / E192178		
				Sheet: 1	Size: Letter	Units: mm



EMC Eupen
5033 Industrial Road., Bldg. 6
Farmingdale, NJ 07727
732-919-1100 Telephone
sales@emceupen.com
www.emceupen.com