SPECIFICATION	
Listed cord (2)	Shielded 3AWG18
Voltage	125V, 50-60 Hz
I A	10
L mH	0.8
C_x uF	0.1
C_y nF	2.2
U_{test} P/N kV dc	2.1
U_{test} P+N/Gnd kV ac	2.1
Max. leakage Current 125V-60Hz mA	2x0.3
Certification	c UL us E515438

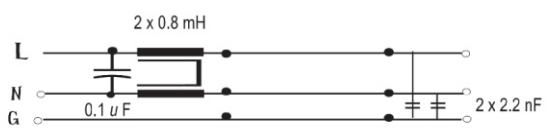

CIRCUIT

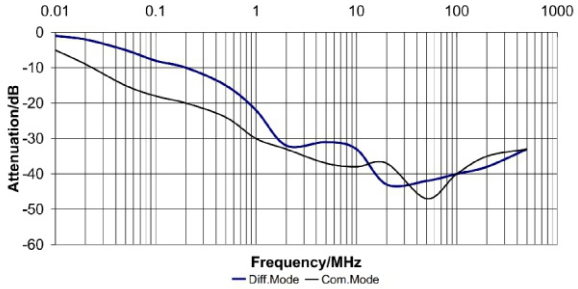

TYPICAL ATTENUATION

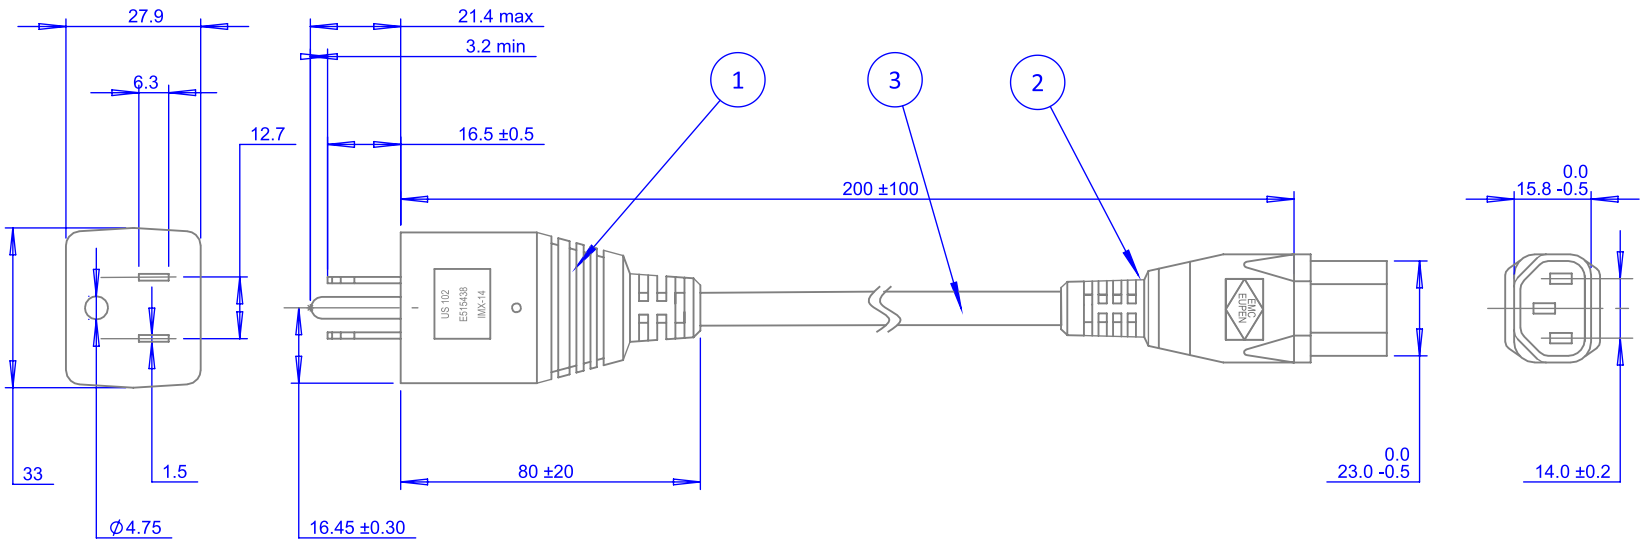

CONSTRUCTION

1. PLUG: 15 A, 125 V, 2 pole, 3 wire plug according to UL 498 (Nema 5-15P) with built-in X capacitor and common mode conductor.

2. CABLE END: Appliance coupler according to IEC 60320-C13.

3. CABLE: Aluminum foil shielded cable SVT 3AWG18.

LENGTH: 2 meters.

COLOUR: Light grey (RAL 7035) with longitudinal blue stripe.

FLAME TEST: According to UL VW-1 and VDE 0742, part 804.

UL FILE NUMBERS: E192178 E472060 E495741

EMC·EUPEN
SOLUTION FOR ELECTRONIC POLLUTION

EMC Eupen
5033 Industrial Road., Bldg. 6
Farmingdale, NJ 07727
732-919-1100 Telephone
sales@emceupen.com
www.emceupen.com

Rev.	Date
1	6/15/05
2	7/22/05
3	7/16/09
4	7/9/10
5	8/7/17
6	11/3/22
7	6/30/26

Dwg no:	NA-101		
Style no:	IMX-14		
Desc:	EMC Power Cord with Built In Filter Elements		
Drawn:	LRA	6/30/26	
Checked:	WJW	6/30/26	
Approved:	JWW	6/30/26	
UL / CSA E515438 / E-192178			
Sheet: 1	Size: Letter	Units: mm	